

UP TO PAINT SLIM

UTS.P | UTS.P.AP | UTS.E | UTS.E.AP

SOLLEVATORE PER ZONE DI PREPARAZIONE E CABINE DI VERNICIATURA

LIFT FOR SPRAY BOOTHS AND PREPARATION AREAS

UTS.P

Up to paint slim con pompa
e braccetti manuali

Up to paint slim with pump
and manual arms

UTS.P.AP

Up to paint slim con pompa
e braccetti automatici

Up to paint slim with pump
and automatic arms



**UTS.E**

Up to paint slim con centralina e braccetti manuali

Up to paint slim with power unit and manual arms

UTS.E.AP

Up to paint slim con centralina e braccetti automatici

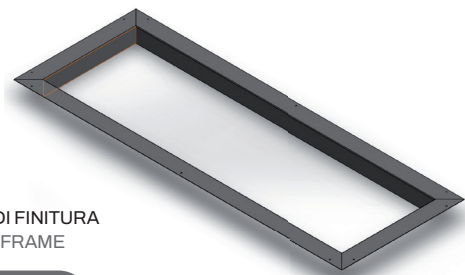
Up to paint slim with power unit and automatic arms

Optional

DISPONIBILI RIALZI PER INSTALLARE
IL SOLLEVATORE SU OGNI TIPO DI FONDAZIONE
RAISERS AVAILABLE TO INSTALL THE LIFT
ON ANY TYPE OF FOUNDATION

UTS.R




VASCA DI CHIUSURA FOSSA
PIT CLOSURE TANK

UTS.08

CORNICE DI FINITURA
FINISHING FRAME

UTS.C**Caratteristiche tecniche | Technical features**

	PESO / WEIGHT	400 kg		LARG. MIN / MIN WIDTH	660 mm
	LUNGHEZZA / LENGHT	1870 mm		POMPA / PUMP	400 bar
	ALT. MAX / MAX HEIGHT	1000 mm		PORTATA / CAPACITY	3000 kg
	ALT. MIN / MIN HEIGHT	110 mm		TAMPONE / BUFFER	60 mm
	LARG. MAX / MAX WIDTH	1850 mm		IMBALLO / PACKAGING	2000 x 1200 x 700 mm

TAMPONI OPTIONAL PER SOLLEVATORI | OPTIONAL PADS FOR LIFTERS**SPIDER - DOUBLE - TWIN SPLIT - UTP - UTS**

KIT.T430

4 Tamponi in gomma da 30 mm | 4 Rubber pads H.30 mm

KIT.T460

4 Tamponi in gomma da 60 mm | 4 Rubber pads H.60 mm

KIT.T4120

4 Tamponi in gomma da 120 mm | 4 Rubber pads H.120 mm

44A.10C

4 Rampe in gomma per auto ribassate | 4 Rubber ramps for low cars